Easy Maintenance

The clamshell design allows full, easy access to the entire paper path, so you can clear paper jams or clean the unit without calling a service technician. The rollers are also easy to replace, improving the unit's cost-effectiveness, and have a long service life.





The clamshell opens widely.

Specifications KV-S4085CW/KV-S4085CL and KV-S4065CW/KV-S4065CL

| | | | KV-S4085CW KV-S4085CL | KV-S4065CW KV-S4065CL | | | KV-S4085CW KV-S4085CL | KV-S4065CW KV-S4065CL |
|---|-----------------------------------|--------------------|--|---|---|--------------------------------|--|--------------------------|
| Scanning Face | | | Duplex | | Power Consumption | Maximum (Scanning) | 1.5 A | 1.4 A |
| Scanning Method | | | Contact-type Color Image Sensor | | | Minimum (Standby) | 0.7 A | 0.7 A |
| Searning Wethou | | | Selectable black and white background reference | | | Sleep mode | 4 W or less | 4 W or less |
| Scanning Speed Letter size 200/300 | | Simplex | Up to 85 ppm (Portrait) Up to 100 ppm (Landscape) | Up to 65 ppm (Portrait) Up to 80 ppm (Landscape) | Operating Environment | Temperature | 59 °F - 86 °F (15 °C - 30 °C) | |
| | Binary | Simplex | | | | Humidity | 20 - 80 % RH | |
| | Dinary | Duplex | Up to 170 ipm (Portrait) Up to 200 ipm (Landscape) | Up to 130 ipm (Portrait) Up to 160 ipm (Landscape) | Storage Environment | Temperature | 32 °F - 104 °F (0 °C - 40 °C) | |
| | | | | | | Humidity | 10 - 80 % RH | |
| | 00 dpi | Simplex | Up to 85 ppm (Portrait) Up to 100 ppm (Landscape) | Up to 65 ppm (Portrait) Up to 80 ppm (Landscape) | External Dimensions *3 (W x D x Weight *3 | ensions *3 (W x D x H) | 18.7 in. x 23.0 in. x 13.0 in. (474 mm x 585 mm x 329 mm) | |
| | Color | Duplex | Up to 170 ipm (Portrait) Up to 200 ipm (Landscape) | Up to 130 ipm (Portrait) Up to 160 ipm (Landscape) | | | 55 lbs. (25 kg) | |
| Resolution | | | 600 dpi Optical Resolution 100 - 600 dpi (1 dpi step) | | Accessories CD ROM : Operation manual, Installation manual, MIV [™] manual, PIE manual, User Utility manual, Control data sheet, RTIV [™] capture software, ISIS [®] / TWAIN driver software, User utility software, Multi color drop Power cord, USB cable & Blower | | | |
| Detection | | | Double feed detection (KV-S4085CW/KV-S4085CL: 3 positions, KV-S4065CW/KV-S4065CL: 1 position), Stapled document detection | | | | User Utility manual, Control data sheet, RTIV™ capture software, ISIS [®] / TWAIN driver software, User utility software, Multi color dropout u | |
| Compression | | | JPEG (color, grayscale) | | | | | |
| Image Output | | | Binary, Grayscale (8 bit), Color, MultiStream™ output | | Roller exchange kit | | KV-SS033 | |
| Binary Mode Halftone | | | Dither, Error diffusion | | | oller cleaning paper | KV-SS03 | |
| bindi y modo | | | | | Options — | printer unit (Pre and/or Post) | KV-SS03 | |
| Image Control Executed by driver software or Panasonic RTIV [™] Other Functions | | | Dynamic Threshold, Automatic De-skewing, Automatic Crop, Automatic Binary/ Color Distinction, Blank Page Removal, Double Exposure, Multi Color Dropout, Smooth Background, Hole Removal, Border Removal, Noise Reduction, Detect File Separation Sheet and much more Length control, Barcode detection (ISIS), Patch code detection, | | | k cartridge | KV-SS021 | |
| | | | | | The scanning speed differs depending on the host computer, operating system, application, image data amount, and paper type. "Weight in pounds" of paper represents the weight of 500 sheets (17 in. x 22 in. / 432 mm x 55: "3 Dimensions and weights are approximate. Dimensions | | | |
| Long Paper Mode | | | Automatic separation, Control sheet, Long paper mode 100 feet (30,480 mm) (crop pages to maximum 100 in. (2,540 mm) per page) | | Dime | ISIONS | | |
| Long Paper I | | | (crop pages to maximum 100 in | (2.540 mm) per page) | | | | |
| Scanning Siz | ze | | KV-S4065CL / KV-S4085CL: 8.9 | . (2,540 mm) per page) in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm) | | | The state of the s | |
| | ze Size (ADF) | Minimum | KV-S4065CL / KV-S4085CL: 8.9 KV-S4065CW / KV-S4085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm | in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm) | | | The second second | 13. |
| | | Minimum Maximum | KV-S4065CL / KV-S4085CL: 8.9 KV-S4065CW / KV-S4085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm | in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm) .) Jes: 1.9 in. x 3.9 in. (48 mm x 100 mm) | | H H | | 13. (329 |
| | | | KV-S4065CL / KV-S4085CL: 8.9 KV-S4065CW / KV-S4085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm In manual feed or thick paper mo | | | I HARD | | |
| Scanning Siz | Size (ADF) | Maximum | KV-54065CL / KV-54085CL: 8.9 KV-54065CW / KV-54085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm In manual feed or thick paper mo 11.7 in. × 17 in. (297 mm × 432 Thin mode: 5 - 13 lbs. (20 - 50 Normal mode: 13 - 42 lbs. (50 - Thick mode: 42 - 56 lbs. (157 - Thick mode: 42 - 56 lbs. (157 - | in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm)) des: 1.9 in. x 3.9 in. (48 mm x 100 mm) mm) /m ² 157 g/m ² 209 g/m ²) g/m ²) | | | | |
| Scanning Siz | Size (ADF) Weight Thickness | Maximum | KV-\$4065CL / KV-\$4085CL: 8.9 KV-\$4065CW / KV-\$4085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm In manual feed or thick paper mo 11.7 in. × 17 in. (297 mm × 432 Thin mode: 5 - 13 lbs. (20 - 50 g Normal mode: 13 - 42 lbs. (50 - Thick mode: 42 - 56 lbs. (157 - Auto mode: 5 - 42 lbs. (20 - 157 1.9 - 7.9 mils (0.04 - 0.2 mm) Straight path: max. 23.6 mils (0 | in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm))) des: 1.9 in. x 3.9 in. (48 mm x 100 mm) mm) //m ²) 157 g/m ²) 209 g/m ²) 6 mm) | | 18.7 in. | | (329 23.0 in. |
| Scanning Siz | Size (ADF) Weight Thickness | Maximum | KV-S4065CL / KV-S4085CL 8.9 KV-S4065CW / KV-S4085CW: 11 1.9 in. × 2.75 in. (48 mm × 70 mm In manual feed or thick paper mo 11.7 in. × 17 in. (297 mm × 432 Thin mode: 5 - 13 lbs. (20 - 50 g Normal mode: 13 - 42 lbs. (50 - Thick mode: 42 - 56 lbs. (157 - Auto mode: 5 - 42 lbs. (20 - 157 1.9 - 7.9 mils (0.04 - 0.2 mm) Straight path: max. 23.6 mils (0 Note: 1 mil = 0.001 in. | in. x 100 in. (227 mm x 2,540 mm) .9 in. x 100 in. (302 mm x 2,540 mm))) des: 1.9 in. x 3.9 in. (48 mm x 100 mm) mm) //m ²) 157 g/m ²) 209 g/m ²) 6 mm) | | 18.7 in. (474 mm) | | (329 23.0 in. |

ENERGY STAR® and the ENERGY STAR certification marks are registered US marks.

MultiStream[™], ISIS[®] and ISIS-Certified[™] are trademarks of Pixel Translations, a division of EMC Corporation.

All other brand or product names are the property of their respective holders. Design and specifications are subject to change without notice.



Panasonic Communications Company of North America One Panasonic Way, Secaucus, NJ 07094 www.panasonic.com/scanners

Smart! **Color Document Scanner** KV-S4085CW/KV-S4085CL·KV-S4065CW/KV-S4065CL

ToughFeed Innovative Paper Feed Mechanism

- 80 ppm / 160 ipm* (KV-S4065CW/KV-S4065CL)



天 表

KV-S4085/4065C BR 4/08



C ● **M** ● **Y** ● **K** ●

Accurate Feeding for Various Paper Types

Have you ever had your work interrupted by a scanner jam, and then found out that important documents were damaged? Or after you've finished scanning, have you discovered that one or more pages were missed? Our innovative scanner uses a reliable, industry-first paper feed mechanism to quickly detect stapled

documents and halt scanning to minimize damage to the optical glass and the document. It also senses double-sheet feeding to prevent misfeedings. This minimizes errors and problems in large scanning runs. Plus, it features full-color scanning (200 or 300 dpi) at up to 200 ipm* with clear, high-resolution results. In short, it gives you both efficiency and quality. *When using the KV-S4085CW Letter, Landscape, 200/300 dpi, Binary/Color.



High-Reliability Scanning

Accurately Feeds Various Size of Documents

Mixed Document Feeding*1

Documents with different sizes and thicknesses can all be fed together. They can be set in center, left, or right alignment. By using left or right single-side alignment, there is no more need to spend time organizing documents according to their size. organizing documents according to their size, so scanning is fast and easy. This function greatly increases work efficiency.

Effective wide scanning of KV-S4065CL and KV-S4085CL are Lett





ner feeds accurately, regardless of alignment.



CHIMIN MUMINING



quickly and stably scans long documents too. Using the straight path, this boosts work efficiency by smoothly scanning long monitoring sheets, like those used for EKG documents, and thick documents.



Two path types enable long-sheet scanning.


ToughFeed **Innovative Paper Feed Mechanism**

Preventing Damage to the Scanning Glass **Stapled Document Detection**

Multiple sensors are used to detect various types of stapled documents, and to immediately stop the scanner when stapling is detected. This minimizes damage to both the document and the optical glass.

天

裏

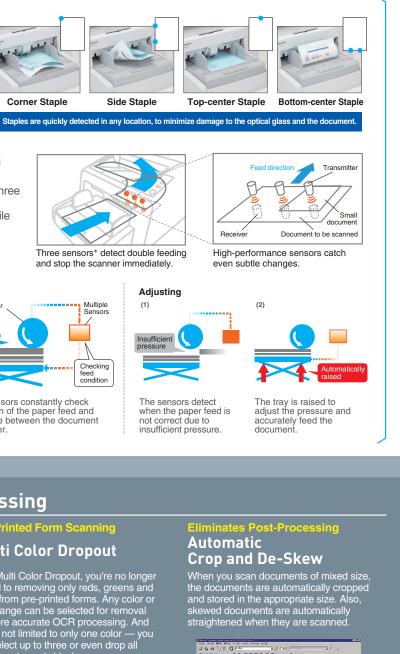


Accurate Scanning Ultrasonic Double-Feed Detection

Ultrasonic sensors detect double feeds. The KV-S4085CW/KV-S4085CL are equipped with three ultrasonic sensors to cover a larger area of the document, rather than the center only, for versatile detection of small documents mixed among regular-sized documents. *KV-S4065CW/KV-S4065CL have one sensor.

Intelligent Feed Control Multiple sensors check the paper feed condition and automatically adjust the roller pressure to ensure that documents of various thicknesses are accurately fed. This makes it more reliable and accurate than conventional feed mechanism.

Smooth Feeding

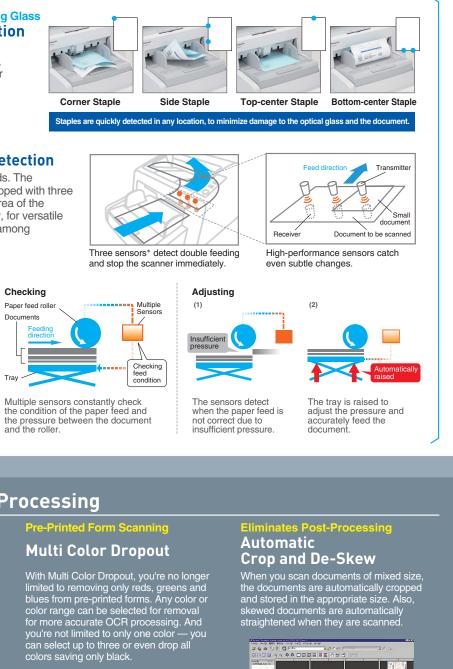

High-Quality Image Processing

More Need to Pre-S Automatic Binary/ **Color Distinction**


This function automatically detects when a set of documents contains some color sheets and some monochrome (B/W) sheets. You can feed these together without sorting, and the machine will automatically compress the data efficient according to whether a sheet is color or monochrome (B/W), so the electronic file size is minimized. This is a feature ound only on high-end sca







The scanner makes it easier to read text data.





The scanner crops white space.